

# Customer Information

The document is only valid in pdf format with the vertical stamp on the right margin.



Printed by M.DUMAN at 16:18:19 EST 17.07.2025

CUBE MX180-CB AMBER EXTREME

RL 2025-06-24

9C1 4626970-EN-00

Released

AM-ENT-IND SSL&EL H 330

ECM

Dilara Uenlue AMW

External no.:

Template: ZOT 10000028

Page 1 of 7

OSRAM GmbH: Chairman of the Supervisory Board: Rainer Irle; Managing Directors: Rainer Barthel (Chairman), Babette Fröhlich;  
Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-No. DE 71568000

## CUBE MX180-CB AMBER EXTREME - Customer Information Sheet

LEDDL136-CB X

Picture may differ from original product.

### Product picture



#330 #DILARA. MINE #OSRAM OLQ(V)  
#  
#AMW #CUBE MX180-CB AMBER EXTREME  
2025-06-24  
#RL-Released  
9C1 4626970-EN-00

# Customer Information



The document is only valid in pdf format with the vertical stamp on the right margin.

Printed by M.DUMAN at 16:18:19 EST 17.07.2025

CUBE MX180-CB AMBER EXTREME

RL 2025-06-24

9C1 4626970-EN-00

Released

AM-ENT-IND SSL&EL H 330

ECM

Dilara Uenlue AMW

External no.:





Template: ZOT 10000028

Page 2 of 7

OSRAM GmbH: Chairman of the Supervisory Board: Rainer Irlle; Managing Directors: Rainer Barthel (Chairman), Babette Fröhlich;  
Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-No. DE 71568000

## Product description

The 7-inch driving light offers four different lighting modes: an amber position light, a boost mode for maximum light output (intended for off-road use only), an ECE-certified white position light and an ECE-approved high beam mode.

Picture	Mode
	ECE-approved White position light
	Amber position light (Offroad only)
	ECE-approved High Beam
	Boost High Beam (Offroad only)

#330 #DILARA. MINE #OSRAM OLQ(V)

#

#AMW #CUBE MX180-CB AMBER EXTREME

2025-06-24

#RL-Released

9C1 4626970-EN-00

# Customer Information



The document is only valid in pdf format with the vertical stamp on the right margin.

Printed by M.DUMAN at 16:18:19 EST 17.07.2025

**CUBE MX180-CB AMBER EXTREME**

**RL 2025-06-24**

**9C1 4626970-EN-00**

Released

AM-ENT-IND SSL&EL H 330

ECM

Dilara Uenlue AMW


External no.:

Template: ZOT 10000028

Page 3 of 7

OSRAM GmbH: Chairman of the Supervisory Board: Rainer Irle; Managing Directors: Rainer Barthel (Chairman), Babette Fröhlich;  
Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-No. DE 71568000

## Dimensions & Material

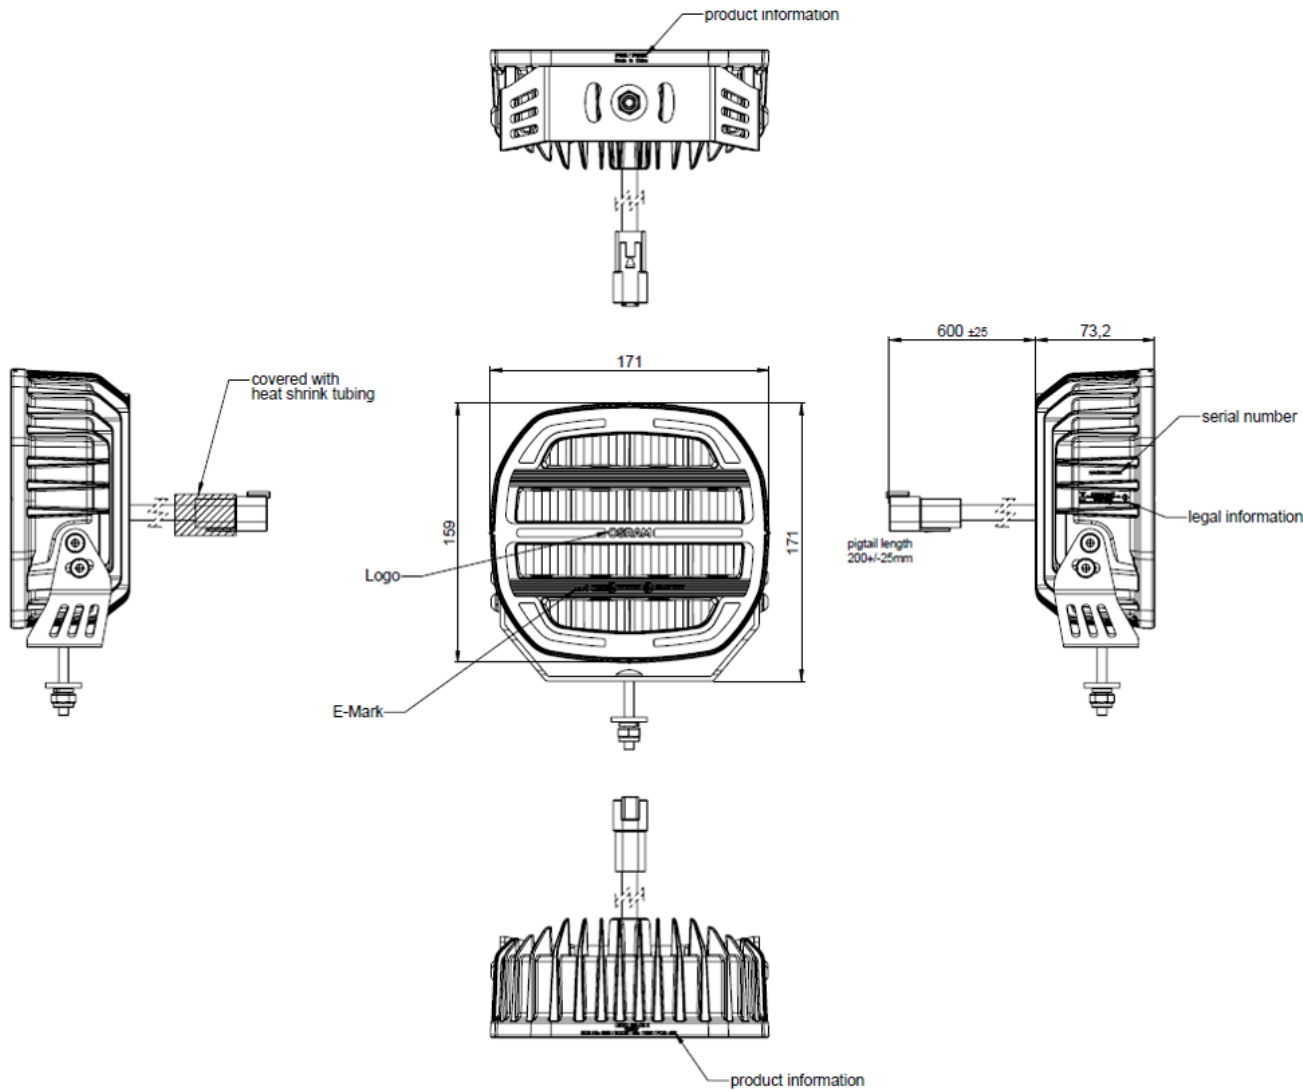

Dimensions (height, length, width)	159mm * 171mm * 73mm
Housing material	Aluminum with black powder painting
Lens material	Polycarbonate
Shape	Cube
Light pattern	Combo
Cable length	600mm
Weight lamp	1338 g
Weight lamp + bracket	1598 g
Mounting / installation arrangements	Mounting with bracket
Adjust angle	+/- 15 degrees

#330 #DILARA. MINE #OSRAM OLQ(V)  
#  
#AMW #CUBE MX180-CB AMBER EXTREME  
2025-06-24  
#RL-Released  
9C1 4626970-EN-00

# Customer Information



The document is only valid in pdf format with the vertical stamp on the right margin.

Printed by M.DUMAN at 16:18:19 EST 17.07.2025

**CUBE MX180-CB AMBER EXTREME**

**RL 2025-06-24**

**9C1 4626970-EN-00**

Released

AM-ENT-IND SSL&EL H 330

ECM

Dilara Uenlue AMW

External no.:


Template: ZOT 10000028

Page 4 of 7

OSRAM GmbH: Chairman of the Supervisory Board: Rainer Irle; Managing Directors: Rainer Barthel (Chairman), Babette Fröhlich;  
Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-No. DE 71568000

## Light distribution

### ECE

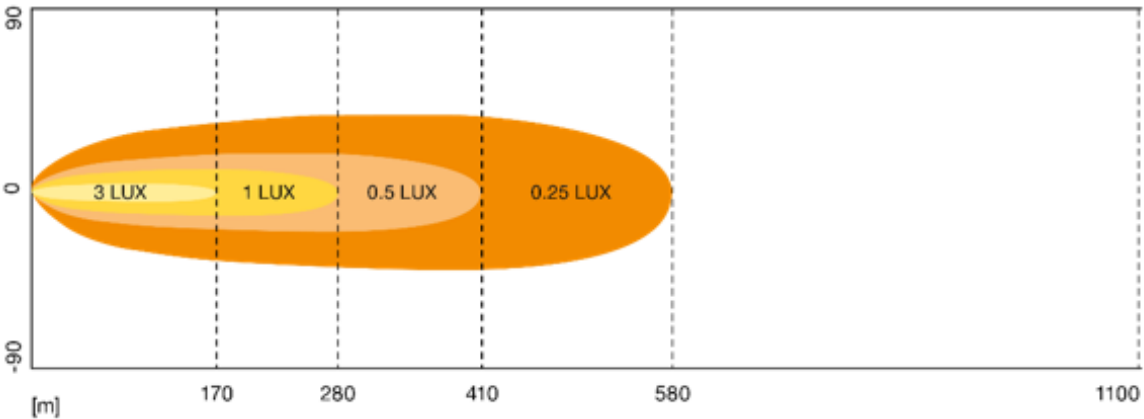


Distribution width at one lux	39m
Distribution length at one lux	280m
Beam angle <sup>1</sup> (horizontal / vertical)	10°/8°
Field angle <sup>2</sup> (horizontal / vertical)	23°/13°

<sup>1</sup>50% maximum intensity

<sup>2</sup>10% maximum intensity

### Boost

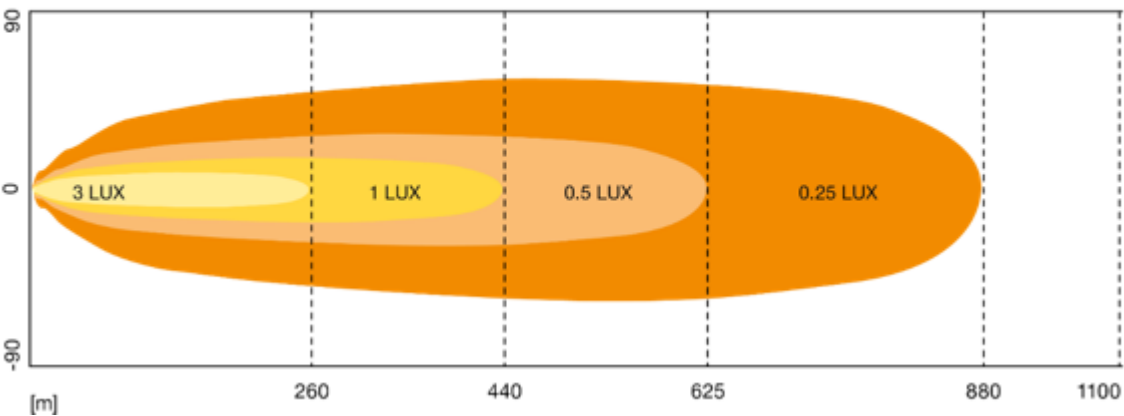

Distribution width at one lux (Boost)	59m
Distribution length at one lux (Boost)	440m
Beam angle <sup>1</sup> (horizontal / vertical) (Boost)	12°/9°
Field angle <sup>2</sup> (horizontal / vertical) (Boost)	22°/13°

<sup>1</sup>50% maximum intensity

#330 #DILARA. MINE #OSRAM OLQ(V)

#

#AMW #CUBE MX180-CB AMBER EXTREME

2025-06-24

#RL-Released

9C1 4626970-EN-00

# Customer Information



The document is only valid in pdf format with the vertical stamp on the right margin.

Printed by M.DUMAN at 16:18:19 EST 17.07.2025

CUBE MX180-CB AMBER EXTREME

RL 2025-06-24

9C1 4626970-EN-00

Released

AM-ENT-IND SSL&EL H 330

ECM

Dilara Uenlue AMW

External no.:

Template: ZOT 10000028

Page 5 of 7

OSRAM GmbH: Chairman of the Supervisory Board: Rainer Irlle; Managing Directors: Rainer Barthel (Chairman), Babette Fröhlich;  
Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-No. DE 71568000

<sup>2</sup>10% maximum intensity

9C1 4626970-EN-00 #RL-Released 2025-06-24 #AMW #CUBE MX180-CB AMBER EXTREME # # #330 #DLARA.MINE #OSRAM OLQ(V)

# Customer Information



The document is only valid in pdf format with the vertical stamp on the right margin.

Printed by M.DUMAN at 16:18:19 EST 17.07.2025

CUBE MX180-CB AMBER EXTREME

RL 2025-06-24

9C1 4626970-EN-00

Released

AM-ENT-IND SSL&EL H 330

ECM

Dilara Uenlue AMW

External no.:

Template: ZOT 10000028

Page 6 of 7

OSRAM GmbH: Chairman of the Supervisory Board: Rainer Irlle; Managing Directors: Rainer Barthel (Chairman), Babette Fröhlich;  
Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-No. DE 71568000

## Packaging content



No.	Part Name	Material	QTY
1	Driving Light	Black die cast aluminum	1
2	User Manual	Paper	1
3	M6x16	Stainless steel	4
4	M6 spring washer	Stainless steel	4
5	M6 washer	Stainless steel	4
6	M8x45	Stainless steel	1
7	M8 spring washer	Stainless steel	1
8	M8 washer	Stainless steel	1
9	M8 nylock nut	Stainless steel / nylon	1
10	M4x8	Stainless steel	1
11	M5x10	Stainless steel	2
12	M4 spring washer	Stainless steel	1
13	M5 rip washer	Stainless steel	2
14	M5 nut	Stainless steel	2
15	Back bracket	Aluminum	1

## Standards and regulations

EMC/EMI	ECE R10 - CISPR25 Class 3
IP Class	IP6K8 / IP6K9K
ECE	ECE R10 / ECE R148 / ECE R149
Others	ROHS, REACH

#330 #DLARA. MINE #OSRAM OLQ(V)  
#  
#AMW #CUBE MX180-CB AMBER EXTREME  
2025-06-24  
#RL-Released  
9C1 4626970-EN-00

# Customer Information



The document is only valid in pdf format with the vertical stamp on the right margin.

Printed by M.DUMAN at 16:18:19 EST 17.07.2025

CUBE MX180-CB AMBER EXTREME

RL 2025-06-24

9C1 4626970-EN-00

Released

AM-ENT-IND SSL&EL H 330

ECM

Dilara Uenlue AMW

External no.:

Template: ZOT 10000028

Page 7 of 7

OSRAM GmbH: Chairman of the Supervisory Board: Rainer Irlle; Managing Directors: Rainer Barthel (Chairman), Babette Fröhlich;  
Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-No. DE 71568000

## Electrical and photometrical data

Characteristics	Symbol	Unit	Major / Minor
Nominal voltage	U	V	12/24V
Voltage range	U	V	10V-32V
Power consumption	P	W	Boost: 116W ECE: 39W POS white/amber: 6W
Effective lumen	Φ	lm	ECE: 3000lm Boost: 7000lm
Raw lumen	Φ	lm	12900lm

## Lifetime

Test			
Lifetime average L70B50	Tc	h	>5.000h

## Further specifications

Test	Rated value
Color temperature	Cold White (6000K), Amber (1700K)
Ambient Temperature range (Ta)	-40°C to +65°C
Storage Temperature range (Ts)	-40°C to +85°C
Number of LED's	12/18 pcs.
LED Type	OSRAM
Connector	Cable with Deutsch connector and pigtail
Thermal management	Overheat protection
Polarity	Polarity protection

## Process of manufacturing

This product is designed and manufactured for the Automotive Aftermarket. Please consider the product specification to match the customer requirements.

## Guarantee

Guarantee	5 years
-----------	---------

## Successive listing of changes

Issue	Reason for change
23.06.2025	First Version

#330 #DILARA. MINE #OSRAM OLQ(V) # #CUBE MX180-CB AMBER EXTREME #AMW #CUBE MX180-CB AMBER EXTREME 2025-06-24 #RL-Released 9C1 4626970-EN-00